


Spiralband


Material: LD-PE
 Typ -2V selbstverlöschend
 Temperatur: -50 °C bis +90 °C
 Farbe: s. Tabelle
 Lieferform: Bunde

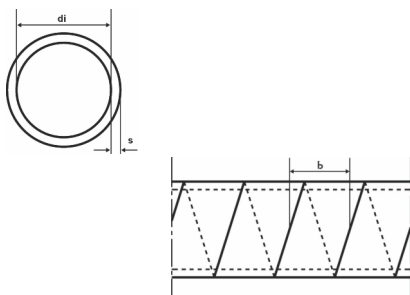

Artikel-Nr.	Farbe	Bündelbereich	Maße di	s	b	MOQ Meter
SB 12-E	natur	2 - 15	2,3	0,6	5,0	50
SB 50-E	natur	4 - 20	3,7	0,65	7,0	25
SB 75-E	natur	7 - 40	6,5	0,75	8,0	25
SB 85-E	natur	9 - 50	8,2	0,85	12,0	25
SB 100-E	natur	11 - 70	10,0	1,0	14,0	25
SB 110-E	natur	13 - 80	12,0	1,0	16,0	25
SB 120-E	natur	18 - 120	17,6	1,2	22,0	25
SB 150-E	natur	23 - 150	22,2	1,4	27,0	20
SB 12-E-SW	schwarz	2 - 15	2,3	0,6	5,0	50
SB 50-E-SW	schwarz	4 - 20	3,7	0,65	7,0	25
SB 75-E-SW	schwarz	7 - 40	6,5	0,75	8,0	25
SB 85-E-SW	schwarz	12 - 50	8,2	0,85	12,0	25
SB 100-E-SW	schwarz	11 - 70	10,0	1,0	14,0	25
SB 110-E-SW	schwarz	13 - 80	12,0	1,0	16,0	25
SB 120-E-SW	schwarz	18 - 120	17,6	1,2	22,0	25
SB 150-E-SW	schwarz	23 - 150	22,2	1,4	27,0	20
SB 12-E-2V	weiß	2 - 15	2,3	0,6	5,0	50
SB 50-E-2V	weiß	4 - 20	3,7	0,65	7,0	25
SB 75-E-2V	weiß	7 - 40	6,5	0,75	10,0	25
SB 85-E-2V	weiß	9 - 50	8,2	0,85	12,0	25
SB 100-E-2V	weiß	11 - 70	10,0	1,0	14,0	25
SB 110-E-2V	weiß	13 - 80	12,0	1,0	16,0	25
SB 120-E-2V	weiß	18 - 120	17,6	1,2	22,0	25
SB 150-E-2V	weiß	23 - 150	22,2	1,4	27,0	20

CT Cut

... die sichere Art Kabelbinder zu entfernen!

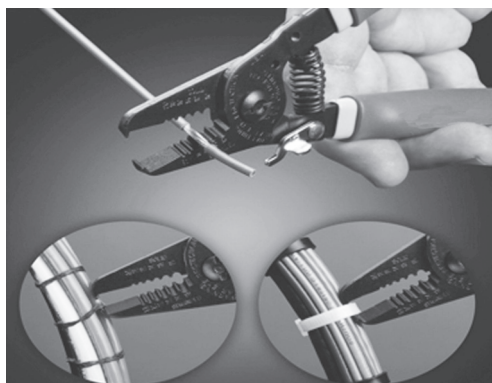

Seite 206