




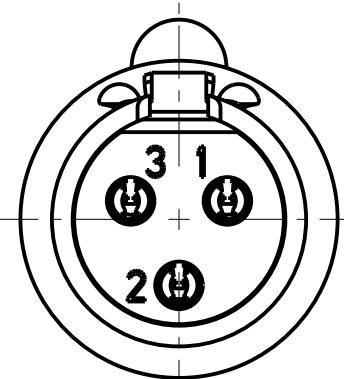


3 PIN

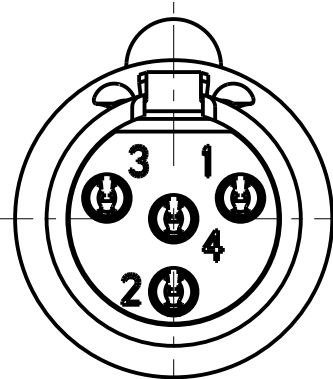


4 PIN

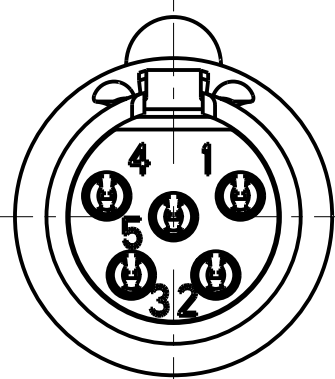


5 PIN

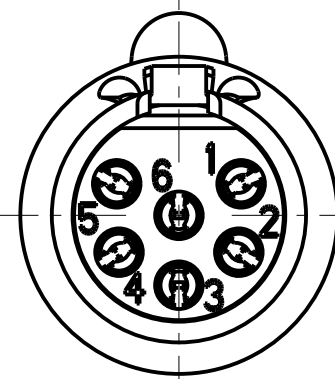





6 PIN

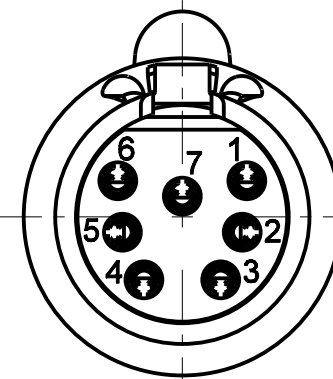

7 PIN

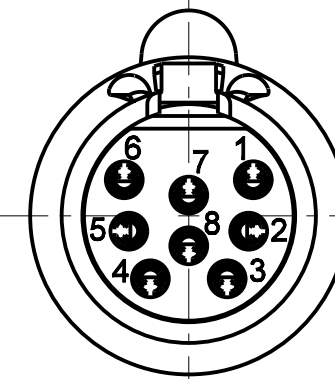


8 PIN

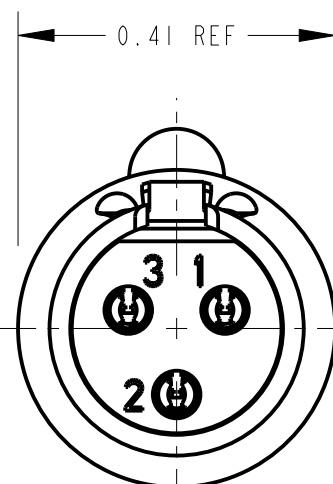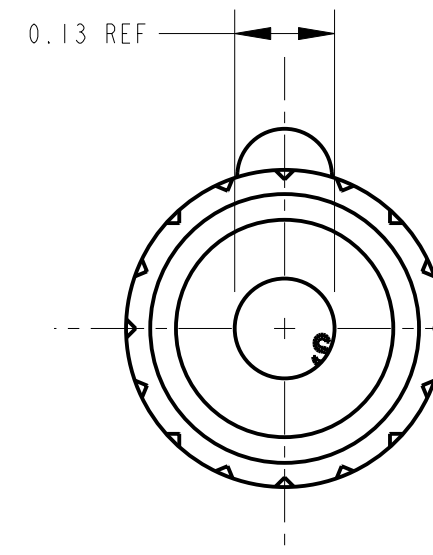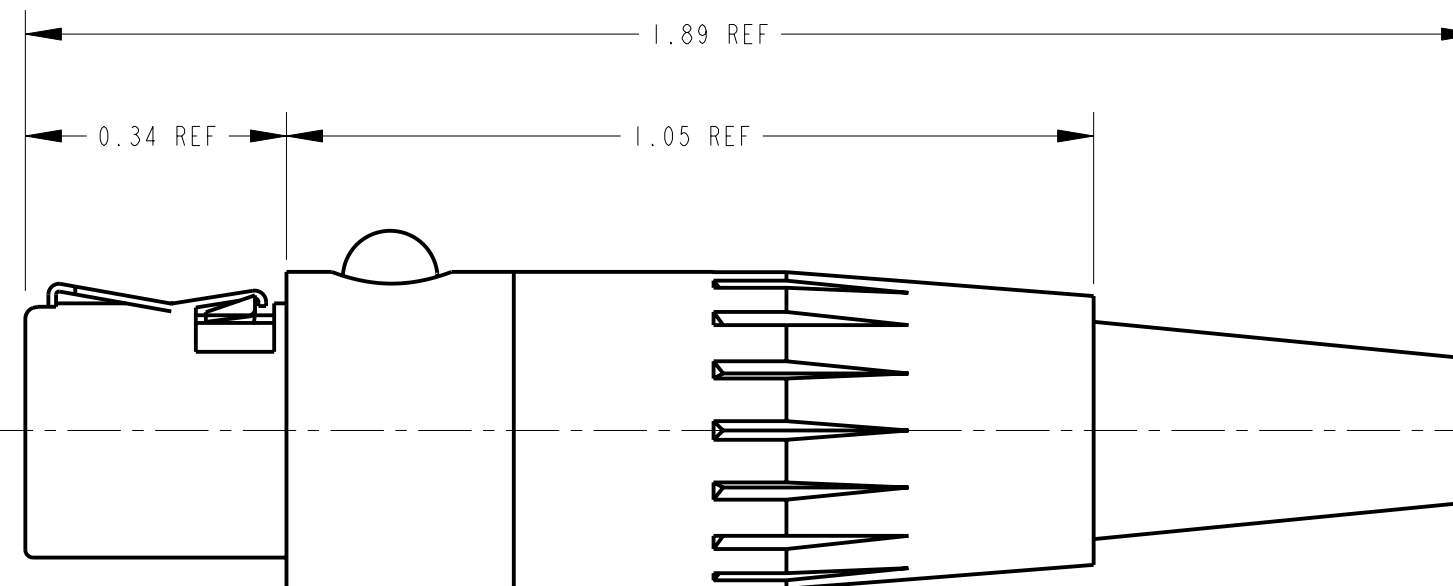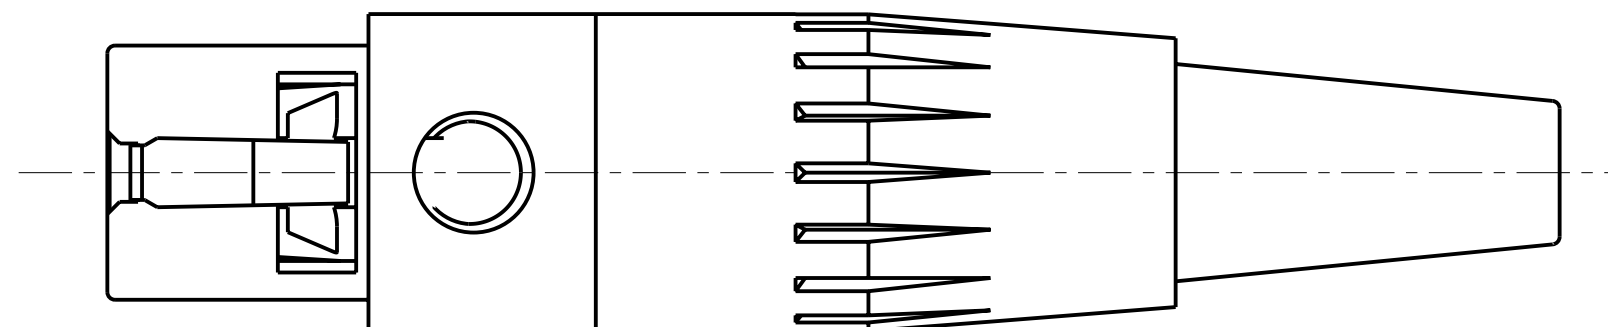


NOTES:

1. MATERIALS:
- HOUSING - BRASS, NICKEL PLATED
 - CONTACTS - BRASS, SILVER PLATED
 - HANDLE - THERMOPLASTIC (UL 94V-0), BLACK
 - FLEX RELIEF - PVC (UL 94V-0), BLACK
 - CALBE CLAMP - STEEL, ELECTRO-TIN PLATED
 - CONTACT INSULATORS - PPS (UL 94V-0)


- T A F E X**
- R**oHS COMPLIANT
 - H**ANDLE FINISH
 - BLANK - BLACK PLASTIC (STANDARD)
 - E** - PLATED PLASTIC
 - C**ONTACT PLATING
 - BLANK - SILVER (STANDARD)
 - AU** - GOLD
 - H**OUSING FINISH
 - BLANK - NICKEL
 - B** - BLACK CHROME
 - F**LEX RELIEF SIZE
 - BLANK - STANDARD SIZE (0.065 - 0.155)
 - L** - NONE, PLASTIC HANDLE ONLY (SEE "TA*FL" DETAIL)
 - N**UMBER OF CONTACTS
 - 3 - 3 CONTACTS
 - 4 - 4 CONTACTS
 - 5 - 5 CONTACTS
 - 6 - 6 CONTACTS
 - 7 - 7 CONTACTS
 - 8 - 8 CONTACTS

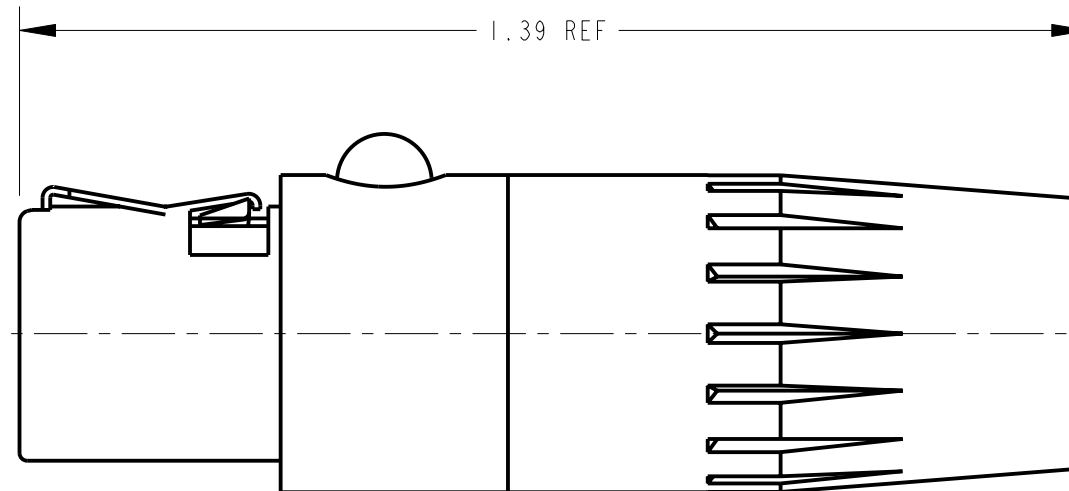

TA * FL SERIES

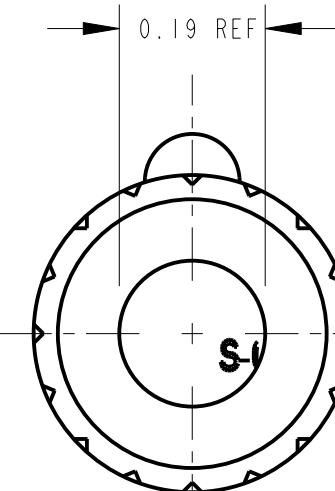

3 PIN - 6 PIN

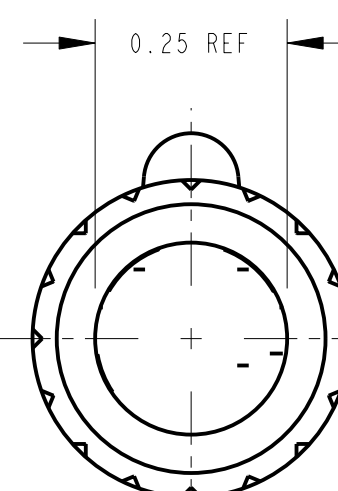

7 PIN & 8 PIN

CUSTOMER DRAWING

REV	ECO NUMBER	DATE	BY	APVD
0A	FIRST DRAWN	2-19-07	TJK	TJK
REVISIONS				

★ STAR SYMBOL DENOTES CRITICAL DIMENSION

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
- TWO PLACE DECIMALS ±0.01
- THREE PLACE DECIMALS ±0.005
- ANGLES ±1°
- ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.

2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002

3. REMOVE ALL BURRS

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
SIZE	WIDTH	MULT	LBS/M	TEMPER
FINISH		MATERIAL		
SPEC No.		SPEC No.		
FIRST USED ON		SCALE 4:1		
DATE DRAWN	BY	CHKD	APVD	
2-19-07	TJK	TJK	TJK	
NAME				PART No.
TINI OG FEMALE STRAIGHT CORD PLUG, RoHS				TA_F_X SERIES
				REV 0A

Switchcraft®