


Anschlußmaße nach IEC 60 169-8
dimensions according to IEC 60 169-8

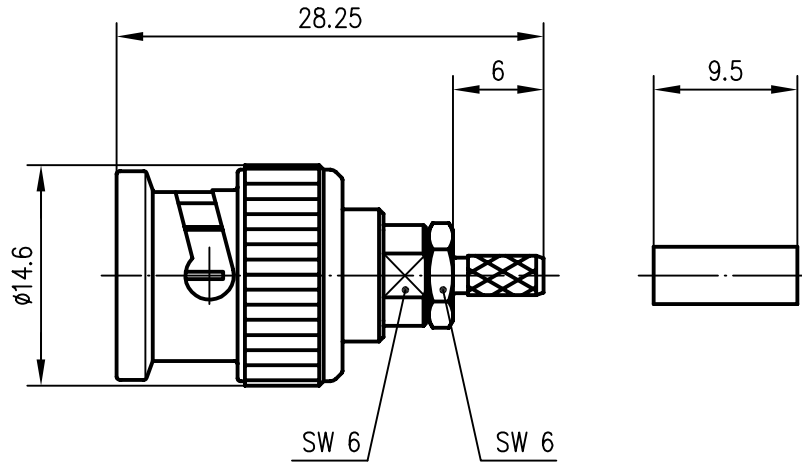

Außenleiter / outer conductor
Innenleiter / inner conductor
Crimprohr / crimp ferrule
sonstige Metallteile / other metal parts
Isolierung / insulator
Dichtung / gasket

CuZn39Pb3
CuZn39Pb3
Cu
CuZn39Pb3 / GD-ZnAl4Cu1
PTFE
Silicon

Cu2Ni5
Cu1Ni2Au0.8
Ni5
Cu2Ni5

Kabel / cable


G 7: KA 22; KX 3B; RG-174/U; RG-188A/U; RG-316/U
G29: 0.45L/1.4 Bedea; G 01130HT-03

Montage / assembly

A2903

VSWR (typisch / typical)

1.17 bei/at 1 GHz
1.23 bei/at 2 GHz
1.23 bei/at 3 GHz

				2004	Datum/date	Name/name	Werkstoff/ material
				gez./drawn	15.07.	GE	
				gepr./appr.	15.07.04	BJ	Oberfläche/ finish
				Norm/stand.			
				Maßstab/scale	Benennung/title		
2:1	BNC-Kabelstecker BNC-Straight Plug						
untol. Maße/ dim. without tolerances according to	Unterl./doc.type	Zeichnungsnr./drawing no.		 Maße/dimensions: mm			
	K	J01000A1294					
Änd./rev. Index	Änderungsmittelung/ revision code	Datum/ date	Name/ name	Ersatz für/ replaces	J01000A1293	Original: DIN A4	