


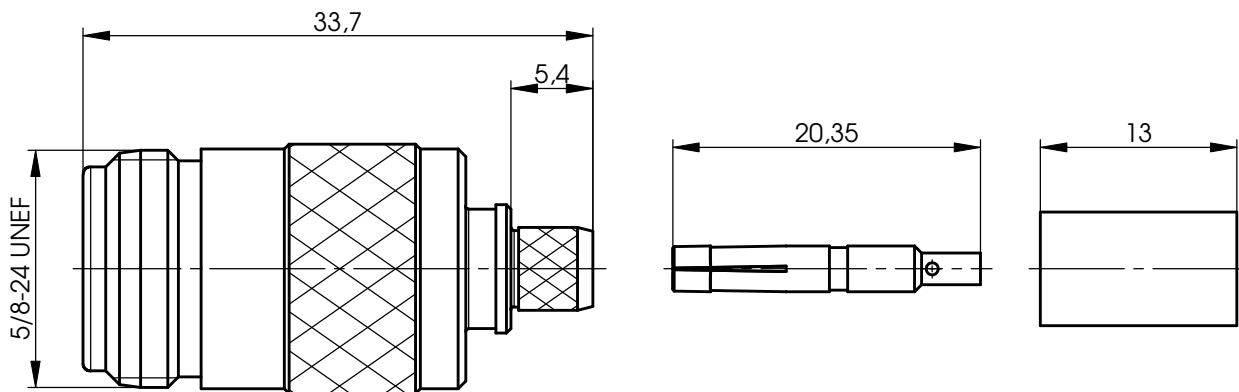

Mechanical characteristics

cables

interface dimensions acc. to
assembly code
centre conductor
outer conductor
mating life
coupling torque

Components

centre contact
outer contact
crimp ferrule
insulator

Electrical characteristics

impedance
frequency
return loss
insertion loss
working voltage
voltage proof
insulation resistance
contact resistance
centre contact
outer contact

Environmental

RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach
Montageanleitung
Innenleiter
Außenleiter
Steckzyklen
Kupplungsdrehmoment

Bauteile

Innenkontakt
Außenkontakt
Crimprohr
Isolierung

Elektrische Eigenschaften

Wellenwiderstand
Frequenz
Rückflussdämpfung
Einfügedämpfung
Betriebsspannung
Prüfspannung
Isolationswiderstand
Durchgangswiderstand
Innenkontakt
Außenkontakt

Umgebung

RoHS konform

(b)

G30 :
02YS(ST)CY 1.4/3.7-50 LI, 1.4/3.8 AF, 7808A,
CNT-240, H 155, HPF 240, LMR-240,
Low Loss 1.4/3.8, MRC 240 AFB, S 04172 D,
Speedfoam 240 HFJ, TZC 500 25, WCX240

(a)

IEC 61169-16 (b)
B3631
Crimp
Crimp
>500
4-6 Nm

Materials / Material


CuNiPb1P (C97)
CuZn39Pb3
SF Cu w
PTFE

Finish / Oberfläche

Cu2Ag5
CuSnZn3
CuSnZn3

50 Ω
0-11 GHz
typ.: 1 GHz-34 dB; 2 GHz-32 dB
<0,1 dB up to / bis 4 GHz
≤ 1kV_{eff} / 50 Hz
2,5 kV_{eff} / 50 Hz
≥ 5 GΩ
≤ 2,0 mΩ
≤ 0,5 mΩ

2002/95/EC

				2009	Datum/ date	Name/ name	Gewicht/ weight (g)	Oberfläche/ surface (mm²)	Werkstoff/ material	
				gez./ drawn	24.06.	BJ				
				gepr./ appr.	30.06.09	JA			Oberfläche/ finish	
				Norm/ stand.						
b a	21948 17233	18.06.10 28.11.05	GB MA	Maßstab/ scale 2:1	Benennung/ title N Straight Jack N-Kabelbuchse				 Telegärtner	
				untol. Maße/ dim. without tolerances according to	Unterl./doc. type K	Zeichnungsnr./ drawing no. J01021B0117				
				Änd./ rev. Index	Änderungsmittelteilung/ revision code	Datum/ date	Name/ name	Ersatz für/ replaces		Zeichnung vom 10.08.2005
									 Maße/ dimensions: mm	
									Original : DIN A4	
									Blatt/ sheet 1 von/ of 1	