


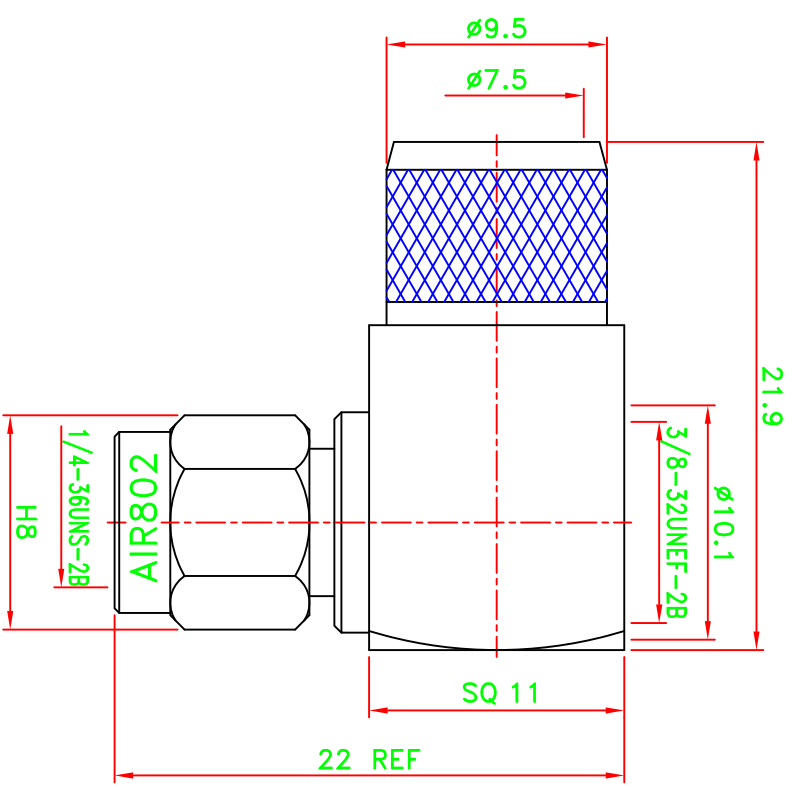


REV	DESCRIPTION \ PER REQUEST	DRAWN	DATE

CRIMP SIZES REQUIRED
CONTACT: SOLDER
FERRULE: .429" [10.9mm]



RECOMMENDED
CABLE STRIPPING DIM'S

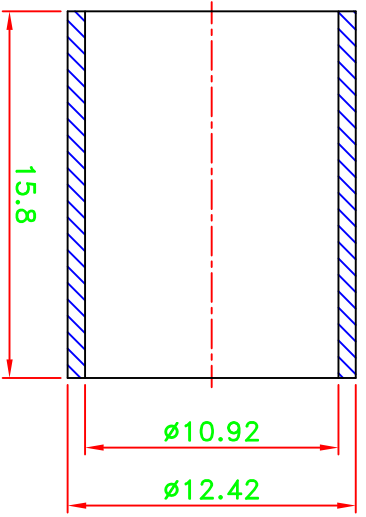

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

NO	Description	Qty	Material	Finish
9	Ferrule	1	Brass	Gold
8	Cap	1	Brass	Gold
7	Shell	1	Brass	Gold
6	Gasket	1	Si-rubber	Orange
5	Retaining ring	1	Brass	Gold
4	Dielectric	1	Teflon	None
3	Pin	1	Brass	Gold
2	Body	1	Brass	Gold
1	Body	1	Brass	Gold

70C01R000-000

PART NO.	APPROVED	CHECKED	DRAWN	DATE
CN4RSPRA	M. Bryant		Wen	09/21/12

* MAJOR DIMENSION	SCALE	UNIT
UNLESS OTHERWISE NOTED TOLERANCES	3/1	mm
0.5-6 = ±0.2		
6-30 = ±0.4		
30-120 = ±0.6		
120-315 = ±1.0		
ANGLES = ±1°		

TITLE	DRAWING NO.	FILE NO.	W:\P~\AS\ASSMA\ASSMA-10420-T-TGG	REV
AIR802 LLC	ASSMA-10420-T-TGG			A

STAMP: AIR802