
	TECHNICAL DATA SHEET		code	BE41231
			version	1
	HOOK UP WIRE		date	2008-01-11
	(14x0.2B) PVC 70C		page	1/1

APPLICATION

IEC 189-3 Equipment wire 70C.

CONSTRUCTION

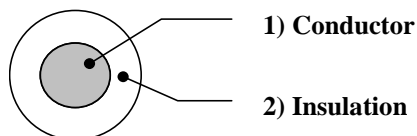

1. Conductor

Material

Stranded bare annealed copper wire

Construction

14x0.2 mm (0.44 mm²)

2. Insulation

Material

PVC

Diameter over insulation

2.05 ± 0.08 mm

Wall thickness minimum

0.40 mm

REQUIREMENTS AND TEST METHODS

Conductor resistance maximum (at 20 °C)

45 Ω/Km

Insulation resistance minimum (at 20 °C)

> 10 MΩ.Km

Dielectric strength test

2000 V ac / 1min

Operating temperature

-25 up to 70C.

MARKING

CE-marking

On label



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

© Belden Wire & Cable B.V.

All rights are reserved. Reproduction in whole or in part is prohibited without the written consent of the copyright owner