


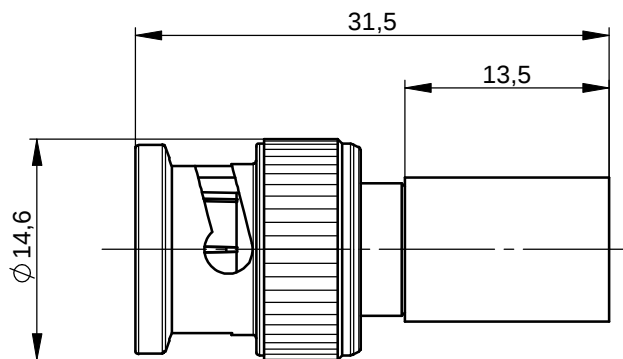

Mechanical characteristics

cables

interface dimensions acc. to assembly code
centre conductor
outer conductor
mating life

Components

centre contact
outer contact
other metal parts
crimp ferrule
insulator
gasket

Electrical characteristics

impedance
return loss
working voltage
voltage proof
insulation resistance
contact resistance
centre contact
outer contact

Environmental

operating temp.
RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach Montageanleitung
Innenleiter
Außenleiter
Steckzyklen

Bauteile

Innenkontakt
Außenkontakt
sonstige Metallteile
Crimprohr
Isolierung
Dichtung

Elektrische Eigenschaften

Wellenwiderstand
Rückflussdämpfung
Betriebsspannung
Prüfspannung
Isolationswiderstand
Durchgangswiderstand
Innenkontakt
Außenkontakt

Umgebung

Betriebstemperatur
RoHS konform

G51 (1.0/4.6-7.7): 1189A Belden, 1190A Belden, 1191AM Belden, 1694F Belden, 3092A Belden, 3092F Belden, YR28890 Belden

IEC 60169-8
A4208
Crimp
Crimp
>500

Materials / Material


CuZn39Pb3
CuZn39Pb3
GD-ZnAl4Cu1
SF Cu w
PTFE
silicone / Silikon

Finish / Oberfläche

Cu1Ni2Au0,8
Cu2Ni5
Zn/Cu6Ni6
Ni5

75 Ω
typ.: 1 GHz - 36 dB; 2 GHz - 31 dB; 3 GHz - 29 dB
 $\leq 0,5 \text{ kV}_{\text{eff}} / 50 \text{ Hz}$
 $1,5\text{XX kV}_{\text{eff}} / 50 \text{ Hz}$
 $\geq 5 \text{ G}\Omega$
 $\leq 20 \text{ m}\Omega$
 $\leq 5 \text{ m}\Omega$

-40°C / +155°C
2002/95/EC

				2007	Datum/ date	Name/ name	Gewicht/ weight [g]	Oberfläche/ surface [mm²]	Werkstoff/ material	
				gez./ drawn	10.12.	BJ				
				gepr./ appr.	10.12.07	JA			Oberfläche/ finish	
				Norm/ stand.						
				Maßstab/ scale	Benennung/ title				 Telegärtner	
				2:1	BNC Straight Plug BNC-Kabelstecker					
				untol. Maße/ dim. without tolerances according to	Unterl./doc. type	Zeichnungsnr./ drawing no.				 Maße/ dimensions: mm
					K	J01002A0072				
Änd./ rev. Index	Anderungsmittelung/ revision code	Datum/ date	Name/ name	Ersatz für/ replaces				Original : DIN A4		
								Blatt/ sheet 1 von/ of 1		