


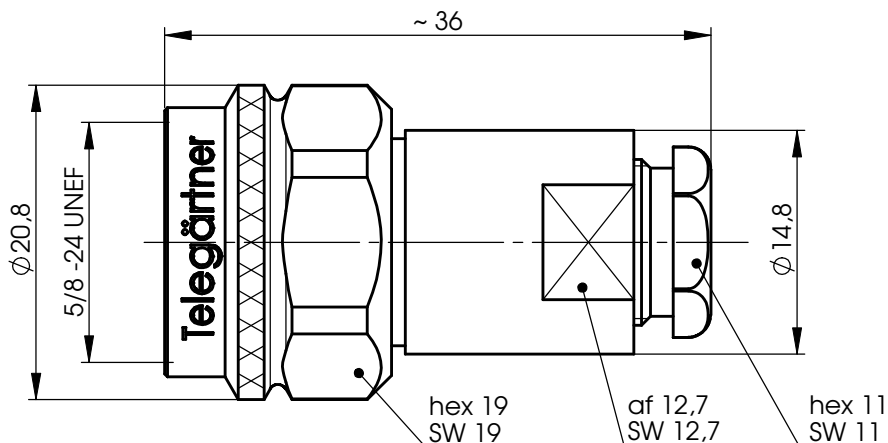

Mechanical characteristics

cables

interface dimensions acc. to assembly code
centre conductor
outer conductor
mating life
coupling torque

Components

centre contact
other metal parts
insulator
gasket

Electrical characteristics

impedance
return loss
working voltage
voltage proof
insulation resistance
contact resistance
centre contact
outer contact

Environmental

operating temp.
protection class
RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach Montageanleitung
Innenleiter
Außenleiter
Steckzyklen
Kupplungsdrehmoment

Bauteile

Innenkontakt
sonstige Metallteile
Isolierung
Dichtung

Elektrische Eigenschaften

Wellenwiderstand
Rückflussdämpfung
Betriebsspannung
Prüfspannung
Isolationswiderstand
Durchgangswiderstand
Innenkontakt
Außenkontakt

Umgebung

Betriebstemperatur
Schutzklasse
RoHS konform

G 1 (RG-58C/U):

7806A Belden, 9907 Belden, CNT-195 Andrew, HPF 195 Harbour Industries, KX 15, LMR-195 TMS, RG-58C/U, WCX195 NEK/CDT

G 5 (RG-223/U):

RG-223/U, RG-400/U, 1.0/2.95 AF Draka RG-141A/U, RG-142B/U

IEC 61169-16

B03

solder / Löt
clamp / Klemm
>500
4 - 6 Nm

Materials / Material

brass / Messing
brass / Messing
PTFE
silicone

Finish / Oberfläche

Cu2Ag5
CuSnZn3

50 Ω

typ.: 1 GHz -36,5 ; 2 GHz -34,0 ; 3 GHz -30,5 dB

≤ 1kV_{eff} / 50 Hz

2.5 kV_{eff} / 50 Hz

≥ 5 GΩ


≤ 1.5 mΩ

≤ 1.0 mΩ

-55°C / +155°C

IP 67 (IEC 60529)

2002/95/EC

				2009	Datum/ date	Name/ name	Gewicht/ weight (g)	Oberfläche/ surface (mm²)	Werkstoff/ material		
				gez./ drawn	07.05.	GB					
				gepr./ appr.	12.05.09	BJ					Oberfläche/ finish
				Norm/ stand.							
				Maßstab/ scale 2:1	Benennung/ title N Straight Plug N- Kabelstecker				 Telegärtner		
				untol. Maße/ dim. without tolerances according to	Unterl./doc. type K	Zeichnungsnr./ drawing no. J01020C1276				 Maße/ dimensions: mm	
				Änd./ rev. Index	Änderungsmittelung/ revision code	Datum/ date	Name/ name	Ersatz für/ replaces			J01020B1276
Blatt/ sheet 1 von/ of 1											