

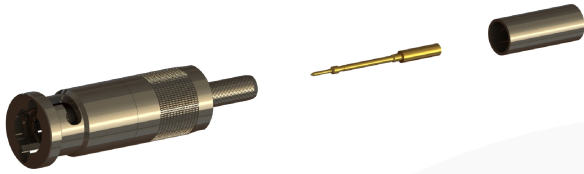


MICRO BNC STRAIGHT CRIMP / CRIMP PLUG

67-005-B66-AB




images for illustration purposes only

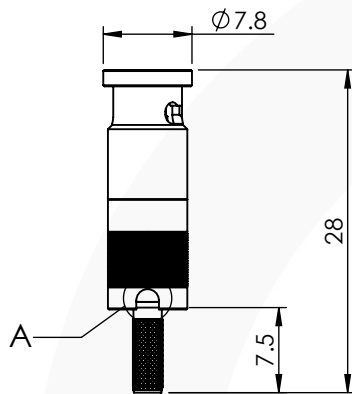

LOCATION SLOT
FOR INSERTION TOOL
(RANDOM ORIENTATION)




DETAIL A



Suitable for Cables:

(AB) RG179, RG187, Belden 179DT

Stripping Dimensions



a = 4.0 mm
b = 8.0 mm
c = 16.0 mm
d = 12.0 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001

Tooling

Centre Contact: SQ 0.95mm A/F Tool No: 96-HTS-43

Crimp Sleeve: Hex 3.25mm A/F Tool No: 96-HTS-43

Alignment Tool: Not Applicable Extraction: 96-1132

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1000 Veff

Insulation res: 10000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 100 N min

Mating cycles: 500

Weight: 4.87 g

Connector Interface


image for illustration purposes only



Performance

-38.5 dB @ 3.0 GHz
-18.9 dB @ 6.0 GHz
-12.5 dB @ 12.0 GHz
-11.5 dB @ 15.0 GHz

Return Loss Graph

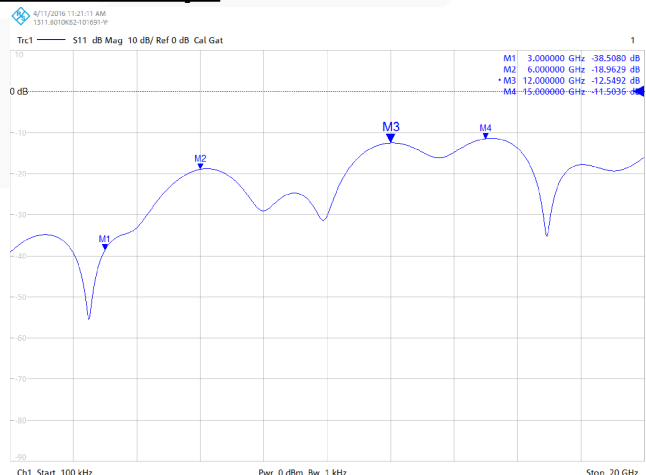

7	SPRING	STAINLESS STEEL	N/A
6	COUPLING NUT	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4 SHEET 1 OF 1

REVISION : A03

ISSUE : 3

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR



DRAWN

CHK'D

APPV'D

DIMENSIONS ARE IN MILLIMETRES

NAME	SIGNATURE	DATE
IG		27/03/2013
GE		28/03/2013

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.