


Anschlußmaße nach IEC 169-8 /
mating face according to IEC 169-8

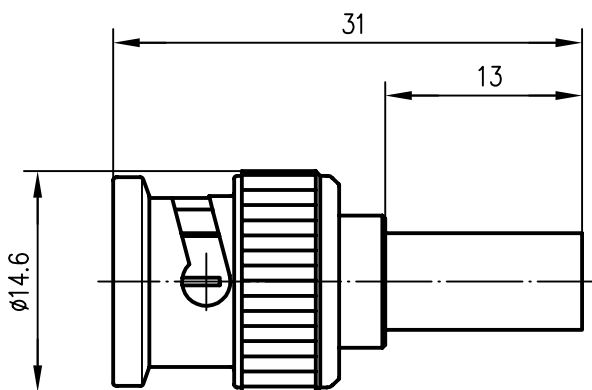


Innenleiter / inner conductor	CuZn39Pb3	Cu1Ni2Au0.8
Crimprohr / crimp ferrule	Cu SF w	Ni5
sonstige Metallteile / other metal parts	CuZn39Pb3, GD-ZnAl4Cu1	Cu2Ni5
Isolierung / insulator	PE-LD	
Dichtung / gasket	Silicon	

Frequenz / frequency	typ. VSWR	max. VSWR	IEC
1 GHz	1.09	1.12	1.15
2 GHz	1.12	1.15	—
3 GHz	1.13	1.19	1.22

Kabel / cable	G 1 : RG-58C/U, 9907 Belden, 7806A Belden KX 15, LMR-195 TMS, HPF 195 Harbour Industries YR23092 Belden
---------------	---

Montage / assembly	A0205
--------------------	-------

				2001	Datum/date	Name/name	Werkstoff/ material		
				gez./drawn	29.08.	PU			
				gepr./appr.	29.08.01	GJ			
				Norm/stand.			Oberfläche/ finish		
				Maßstab/scale	Benennung/title				
				2:1	BNC-Kabelstecker BNC Straight Plug			 Telegärtner	
				untol. Maße/ dim. without tolerances according to	Unterl./doc.type	Zeichnungsnr./drawing no.			 Maße/dimensions: mm
					K	J01000F1255			
Änd./rev. Index	Änderungsmittelung/ revision code	Datum/ date	Name/ name		Ersatz für/ replaces				Original: DIN A4