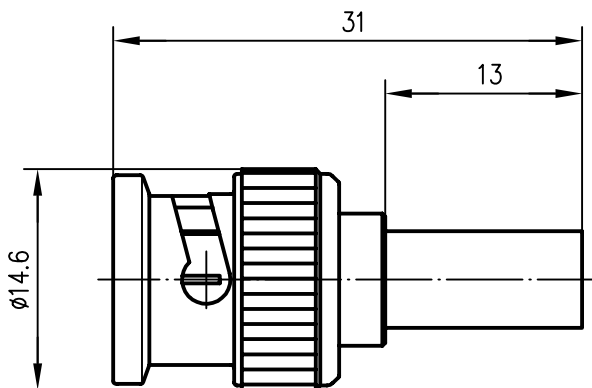


Anschlußmaße nach IEC 169-8 /
mating face according to IEC 169-8





Innenleiter / inner conductor	CuZn39Pb3	Cu1Ni2Au0.8
Crimprohr / crimp ferrule	Cu SF w	Ni5
sonstige Metallteile / other metal parts	CuZn39Pb3, GD-ZnAl4Cu1	Cu2Ni5
Isolierung / insulator	PTFE	
Dichtung / gasket	Silicon	

Frequenz / frequency	typ. VSWR	max. VSWR	IEC
1 GHz	1.09	1.12	1.15
2 GHz	1.12	1.19	—
3 GHz	1.12	1.19	1.22

Kabel / cable G 1 : RG-58C/U, 9907 Belden, KX 15
YR23092 Belden

Montage / assembly A0205

2000	Datum/date	Name/name	Werkstoff/ material
	gez./drawn	18.04. PU	
	gepr./appr.	18.04.00 GJ	
	Norm/stand.		Oberfläche/ finish
	Maßstab/scale	Benennung/title	
2:1	BNC-Kabelstecker BNC Straight Plug		 Telegärtner
untol. Maße/ dim. without tolerances according to	Unterl./doc.type	Zeichnungsnr./drawing no.	
K		J01000A1255	
And./rev. Index	Änderungsmittellung/ revision code	Datum/ date	Name/ name
Ersatz für/ replaces			
			 Maße/dimensions: mm
			Original: DIN A4