


# SWITCHCRAFT®

A H E I C O C O M P A N Y

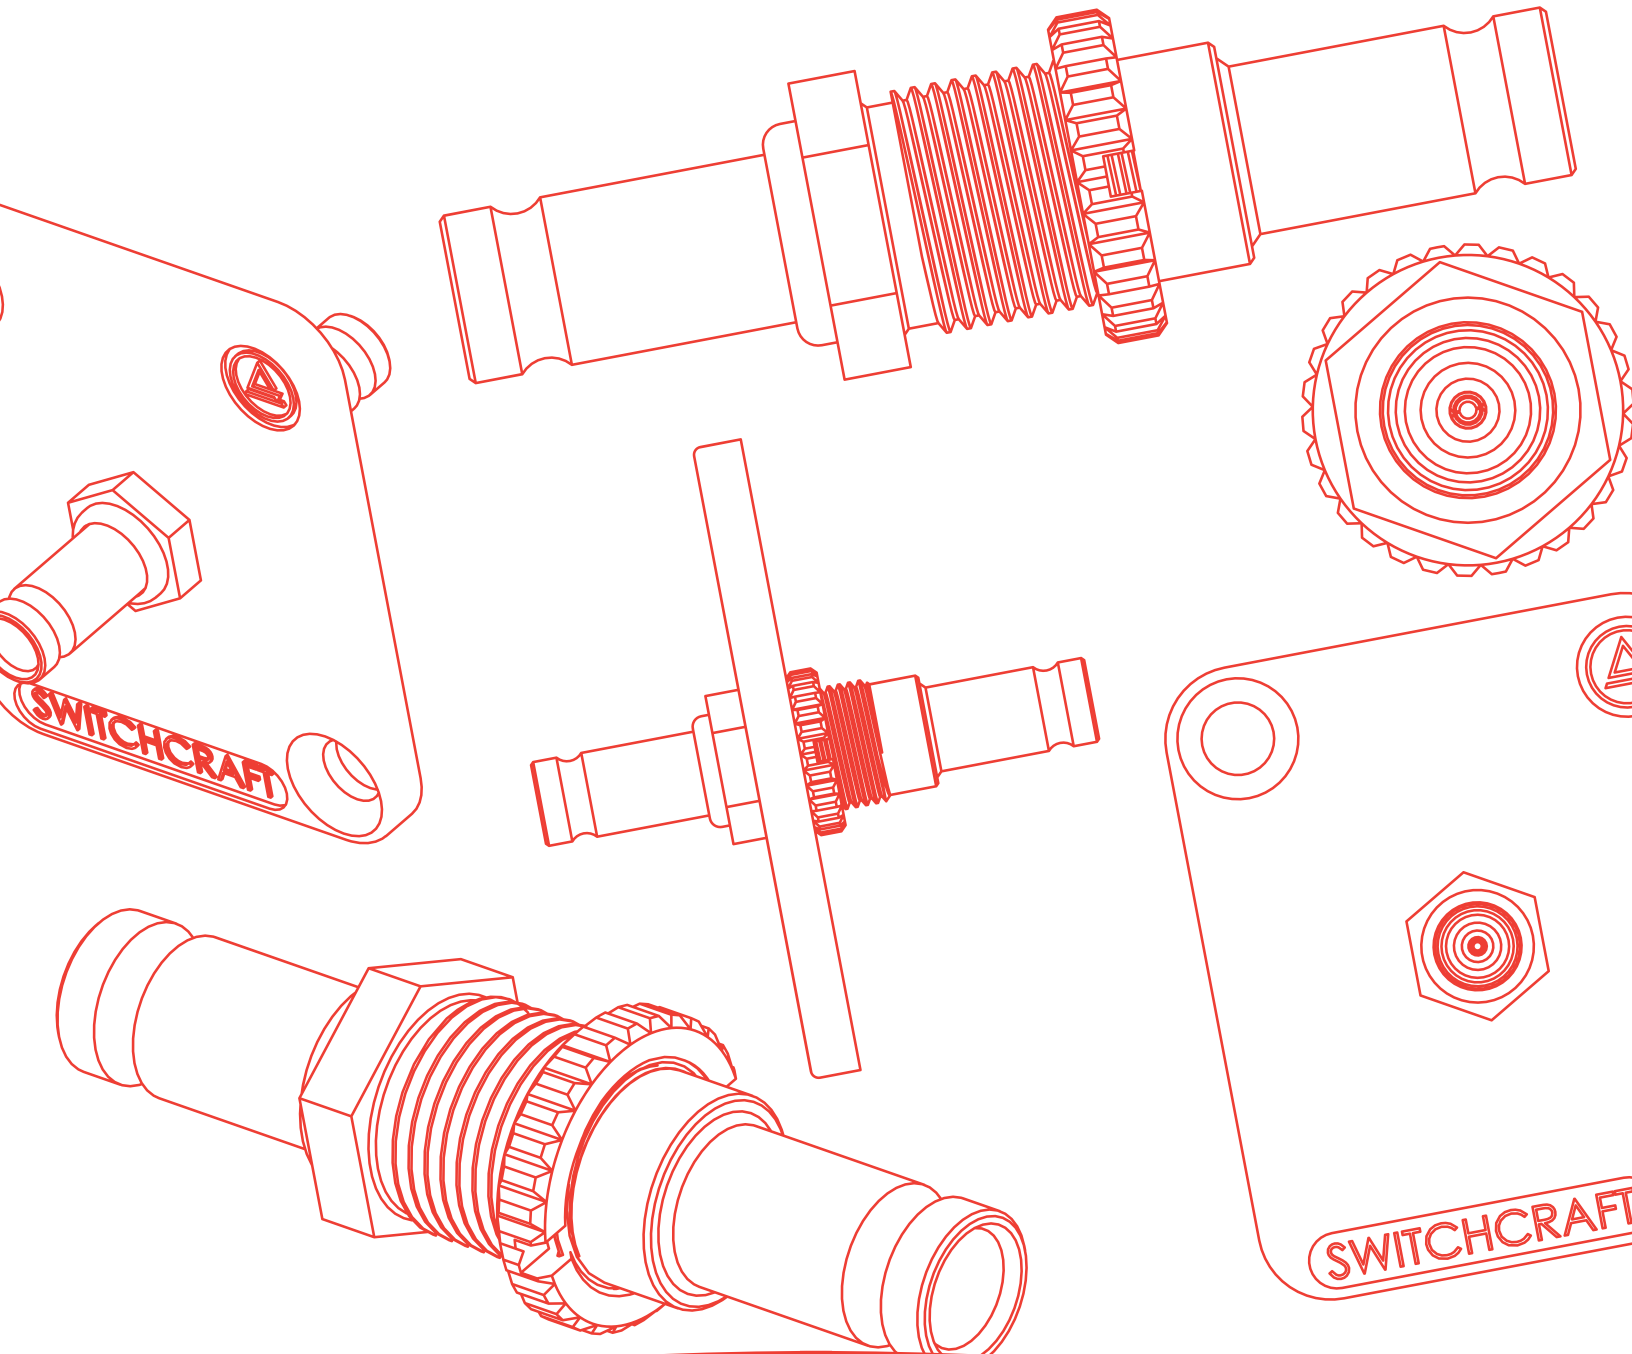

## EH SERIES: EH DIN 1.0/2.3 FEED-THRU

NPB | 615

# EH SERIES: EH DIN 1.0/2.3 FEED-THRU

NPB | 615



## NEW OPTION

Switchcraft is proud to introduce its newest option, the Female/Female DIN 1.0/2.3 coupler panel mount, to the EH series of audio, video and data connectors. The EH Series is an extensive line of panel mount connectors used to create custom I/O panels and wall plates for A/V, pro audio, broadcast, mobile production and post production installations.

## FEATURES & BENEFITS

Compatible with Switchcraft® QGPK Series rack panels and WP Series wall plates

All connectors fit into a standard XLR panel cutout


Available in nickel plated or black finish EH flange

Available individually or bagged with mounting screws


# EH SERIES: EH DIN 1.0/2.3 FEED-THRU

## NPB | 615

### DIN 1.0/2.3 FEED-THRU CONNECTOR - PART NUMBER DINFT

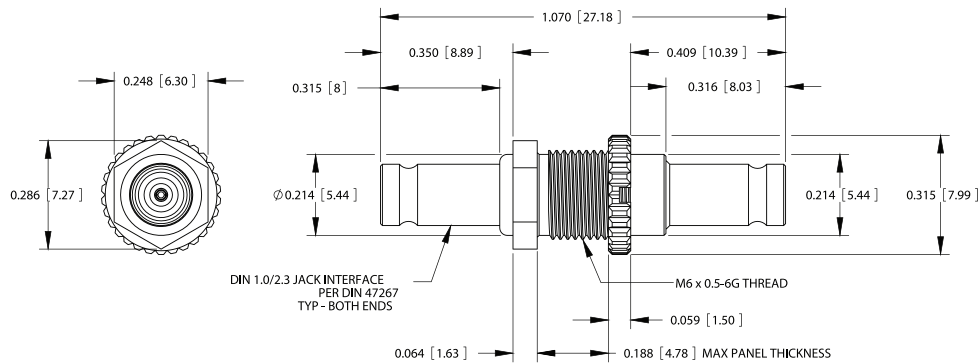


### EH SERIES DIN 1.0/2.3 FEED-THRU - PART NUMBER EHDIN1023X2

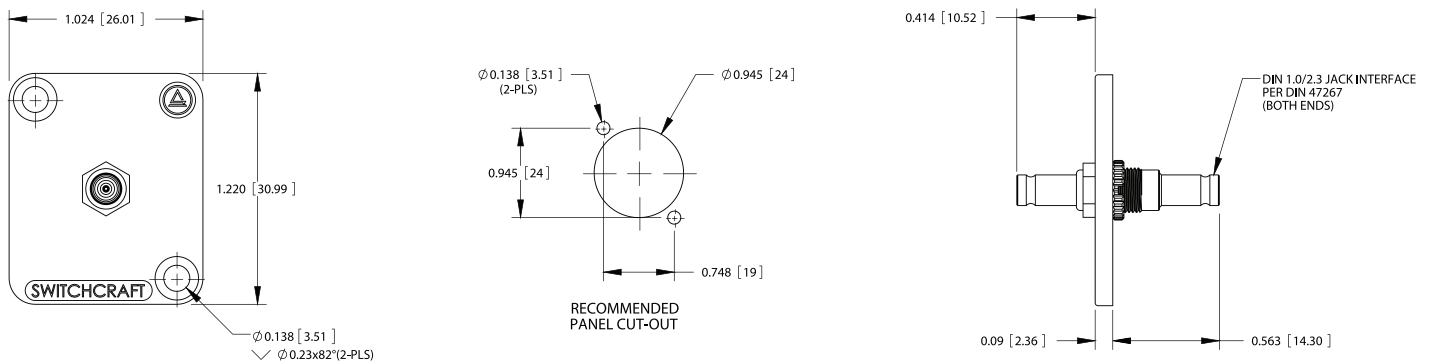

Note: For flange mounting screws to be shipped with assembly, add the suffix "PKG" to the part number.

### DIN 1.0/2.3 FEED-THRU PATCHBAY - PART NUMBER DIN96K1D

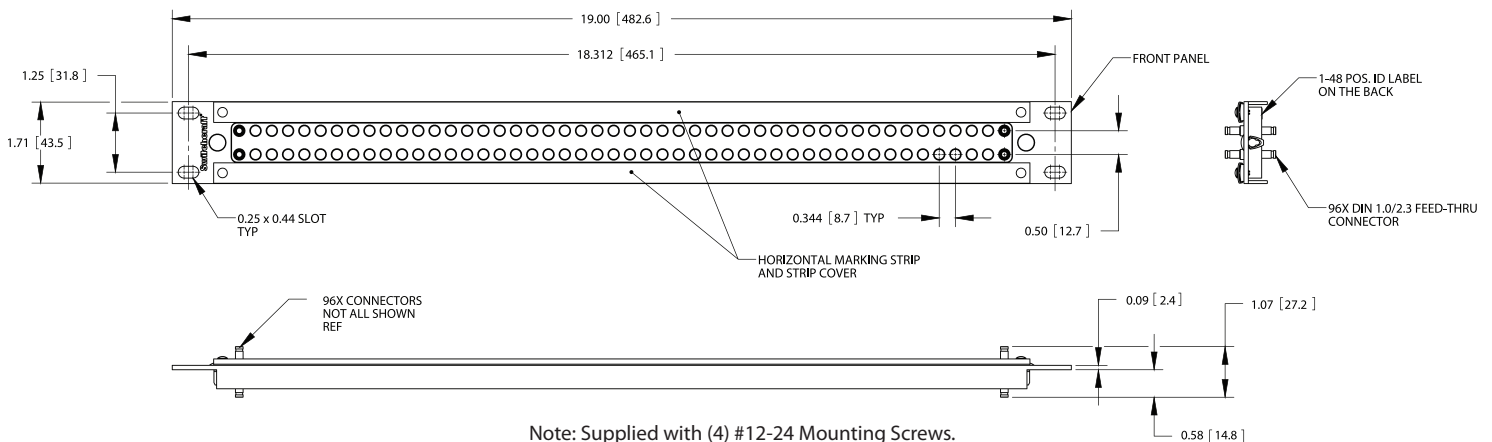

Note: Supplied with (4) #12-24 Mounting Screws.

UNITS ARE LISTED IN INCHES [mm]. ALL DIMENSIONS ARE REFERENCE ONLY.

PLEASE VISIT [WWW.SWITCHCRAFT.COM](http://WWW.SWITCHCRAFT.COM) FOR THE MOST UP-TO-DATE PRODUCT SPECIFICATIONS.  
MADE IN USA

# EH SERIES: EH DIN 1.0/2.3 FEED-THRU

NPB | 615

## SPECIFICATIONS

### ELECTRICAL SPECIFICATIONS

|                        |                     |
|------------------------|---------------------|
| Impedance:             | 75Ω                 |
| Frequency Range:       | 0-3 GHz             |
| W/S Voltage:           | Vrms                |
| Insulation Resistance: | 1 GΩ min            |
| Contact Resistance:    | 30 mΩ max (Initial) |
| Insertion Loss:        | -1.0dB max          |
| Return Loss:           | per SMPTE 424M      |

### MECHANICAL SPECIFICATIONS

|                        |                |
|------------------------|----------------|
| Operating Temperature: | -40°C to +85°C |
| Life:                  | 500 cycles min |

### MATERIAL

|                           |                              |
|---------------------------|------------------------------|
| Flange:                   | Zinc, Alloy                  |
| Mounting Nut:             | Copper Alloy, Nickel Plated  |
| Front Panel:              | Aluminum, Anodized           |
| Insert:                   | Thermoplastic, Black         |
| Connector Shell:          | Copper Alloy, Nickel Plated  |
| Contact:                  | Copper Alloy, Gold Plated    |
| Insulators:               | Thermoplastic                |
| Horizontal Marking Strip: | Thermoplastic, White         |
| Designation Strip Cover:  | Thermoplastic, Clear         |
| Key-Hole Clips:           | Thermoplastic                |
| Screws:                   | Steel, Zinc or Nickel Plated |

### NOTE

This product is RoHS Compliant.