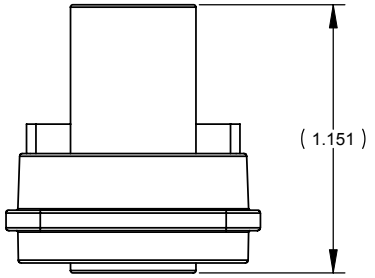

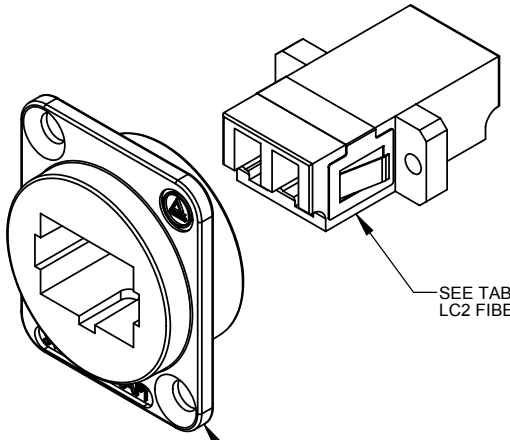



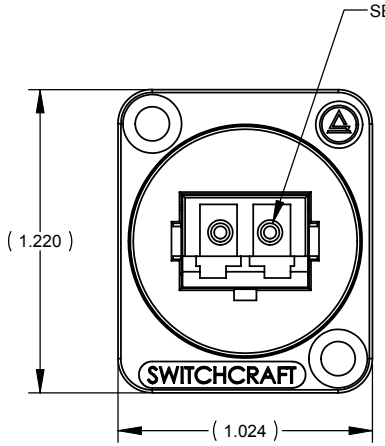

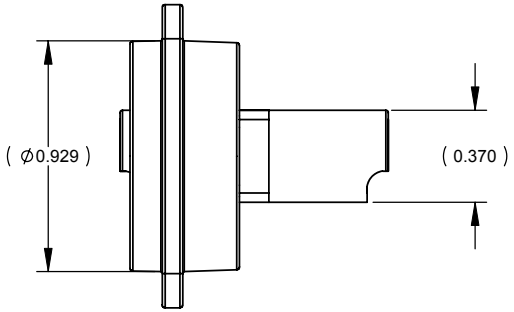

NOTES:

1. INSERTION LOSS: 0.20 dB MAX.
2. OPERATION TEMP: -20°C TO +70°C.
3. PRODUCT COMES WITH DUST CAPS. (NOT SHOWN)
4. SLEEVE MAT'L: SINGLE-MODE: CERAMIC (ZIRCONIA)
   MULTI-MODE: PHOSPHORUS BRONZE
5. THIS PRODUCT IS RoHS COMPLIANT.

PRELIMINARY

CUSTOMER DRAWING

PART NUMBER	LC2	ADAPTER COLOR
EHLC2	SINGLE-MODE	BLUE
EHLC2M	MULTI-MODE	BEIGE

REV	ECO NUMBER	DATE	BY	APVD
*	*	*	*	*

REVISIONS

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
   - TWO PLACE DECIMALS ±0.02
   - THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.

SIZE	WIDTH	MULT	LBS/M	TEMPER
*	*	*	*	*

FINISH *
SPEC No. *

MATERIAL *
SPEC No. *

FIRST USED ON *

SCALE 2:1

DATE DRAWN	BY	CHKD	APVD
5/12/08	JGK	*	*

Switchcraft®

SHEET 1 OF 1

NAME E SERIES LC/LC FIBER OPTIC ADAPTER

PART No. EHLC2_SERIES

REV 0A

SolidWorks CAD File B