


Datasheet

4K HDMI Kabels



Plug: 0.3 - 3 m

- High-Speed-HDMI-Cable with Ethernet (network)
- HDMI A male plug to HDMI A male plug
- Gold plated contacts and shells
- Black cable, black plug
- Moulded plugs
- high-density triple-layer shielding for best quality
- twisted pair cable construction for optimum signal quality
- transmits HD video and pure audio signals
- Suppress EMI interference, make the image vivid
- HDMI Ethernet Channel: Adds highspeed networking in addition to an HDMI connection so that users can use the full advantage of their IP-enabled devices without a separate network cables are required (if the devices support HDMI with Ethernet)
- Audio Return Channel (ARC): Allows an HDMI-connected TV with a built-in TV tuner to send audio data by „upstream“ to a surround audio system, whereby a separate audio cable is no longer required
- 3D over HDMI: Defines input and output protocols for major 3D video formats, paving the way for true 3D gaming and 3D home theatre applications
- 4K x 2K Video Support: Enables video resolutions far beyond 1080p, supporting next-generation displays of (UHD 2.160p support)
- additional color spaces: support for additional color models used in digital photography and computer graphics
- for the following applications: HDTV, PC / Notebook, XBOX, PlayStation, Blu-ray DVD/HD-DVD, DC/DV, Projector
- Compatible with all previous HDMI cable variants
- with HDMI Ethernet Audio Control (HEAC) and 3D support
- resolutions up to 4K @ 50/60Hz, (2160p), 4-times the resolution of FullHD

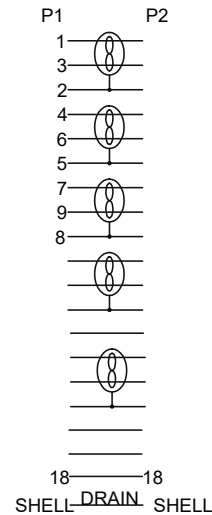

Plug: 5 - 10 m

- up to 32 audio channels for a multi-dimensional immersive audio experience
- up to 1536kHz audio sample frequency for highest signal integrity
- support simultaneous delivery of dual video streams to display content for multiple users on the same screen
- simultaneous delivery of multi-stream audio to multiple users (up to 4) is supported
- support widescreen displays such as the 21:9 format
- dynamic synchronization of video and audio streams
- CEC commands for advanced control and control of consu-

Datasheet

4K HDMI Kabels

Specs 0,3 t/m 3 meter:

③	MOLD	BLACK PVC
②	HDMI AM	BLACK INSULATION,GOLD PLATED PIN ADN SHELL
①	CABLE	(28AWG/7 BC+E+AM)*5+28AWG/7 BC*4C+AM+E+ BRAID /AL-MG,JACKET:PVC/BLACK ,OD7.4±0.15MM
NO.	PART NAME	DESCRIPTION

Specs 5 meter

④	DUST CAP	TRANSPARENT
③	MOLD	BLACK PVC
②	HDMI AM	BLACK INSULATION,GOLD PLATED PIN ADN SHELL
①	CABLE	(26AWG/7 BC*1P+E+AM)*4+(28AWG/7 BC*1P+E+AM)+26/7AWG*4C+AL-FOIL +E+BRAID/AL-MG,JACKET:PVC/BLACK ,OD8.6±0.2MM
NO.	PART NAME	DESCRIPTION

Specs 7,5 &
10 meter

④	DUST CAP	TRANSPARENT
③	MOLD	BLACK PVC
②	HDMI AM	BLACK INSULATION,GOLD PLATED PIN ADN SHELL
①	CABLE	(24AWG/7 BC*1P+E+AM)*4+(24AWG/7 BC*1P+E+AM)+24/7AWG*4C+AL-FOIL +E+BRAID/AL-MG,JACKET:PVC/BLACK ,OD10.5±0.2MM
NO.	PART NAME	DESCRIPTION